

# Brake



FAT 50

ref: 313.920.00

## Specifications


Nominal torque	5	N.m	<i>ft.lbf</i>	<b>4</b>
Minimal torque	0,1	N.m	<i>ft.lbf</i>	<b>0.07</b>
Coil resistance - 20°C			<i>W</i>	<b>24</b>
Rated current DC			<b>A</b>	<b>0.50</b>
Rotor inertia	99.10 <sup>-6</sup>	kg.m <sup>2</sup>	<i>lb.ft<sup>2</sup></i>	<b>23 10<sup>-4</sup></b>
Weight	1.7	kg	<i>lb</i>	<b>3.75</b>
Heat dissipation continuous sustained			<b>W *</b>	<b>70</b>

\* Heat dissipation is the mechanical power ( $P = cw$ ) maximum allowable.

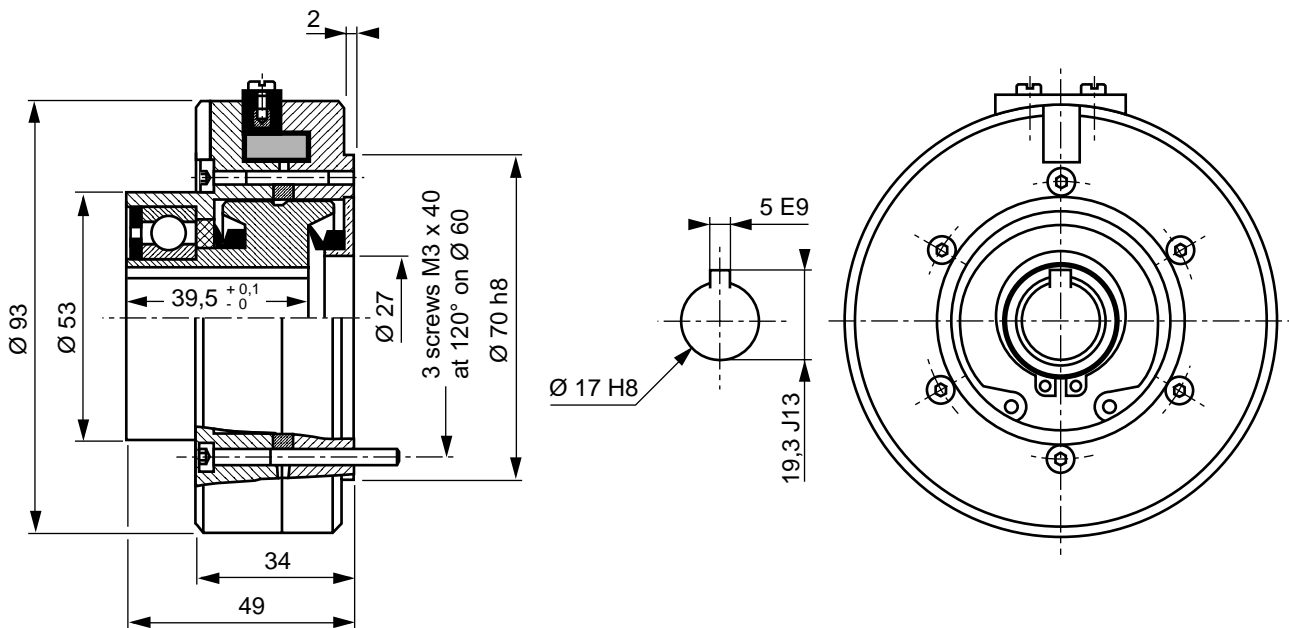

## Utilization

- Mounting must be made without any stress.  
Lubricated for life (other internal lubrication not allowed).  
The shaft should be lubricated upon assembly, to prevent seizing.
- Low DC current power supply for coil.  
(See MEROBEL Electronic data sheets).
- The standard device is designed for horizontal shaft orientation,  
and a minimal speed of 60 RPM. Maximum speed is 3000 RPM.  
(without exceeding the max. heat dissipation capability)
- For Engineering application, please contact our technical support.
- In normal use, the outside temperature of the device can increase up to 100°C,  
without damage.

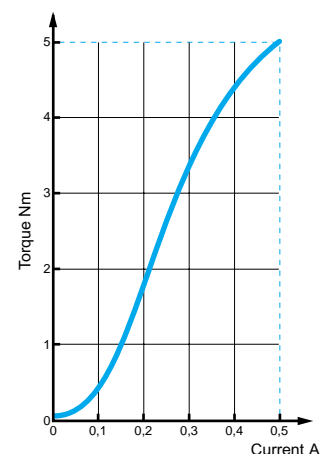

## Safety

- If the device is to be used in dusty, humid or corrosive environment, special protection needs to be considered.

## Maintenance

- Two procedures are available:
  - Full inhouse maintenance servicing:
 

<b>MEROBEL Inc.</b> after sales	Ph 732 493 3232
1705 Valley Road	Fax 732 493 2949
Wanamassa, NJ 07712	
  - Spare parts or repair kits (depending on maintenance level) :
 

- Kit (powder, ball bearings, seals, felts)	ref: 313.900.71
- Coil	ref: 313.920.05
- Rotor	ref: 313.900.03
- In any case, our After Sales service is at your disposal.

## Recommended mounting principles

